

# 'DMGI' Multi-Station Gauge Isolators


## Standard and Remote



DMIC's 'KG' and 'RG' Multistation isolators allow Designers to provision centralized multi-point monitoring of critical subsystems.

- 1/4" SAE/BSPP Thread
- Built in snubber and drain of residual pressure to tank in "off" positions
- Special "reverse" model for bolt-in replacement of foreign spool type isolator - please call Factory
- Available with Buyer's choice of sealing materials
- **Please Call Factory to specify if for Low pressure / Gas applications**

## Dimensional Views

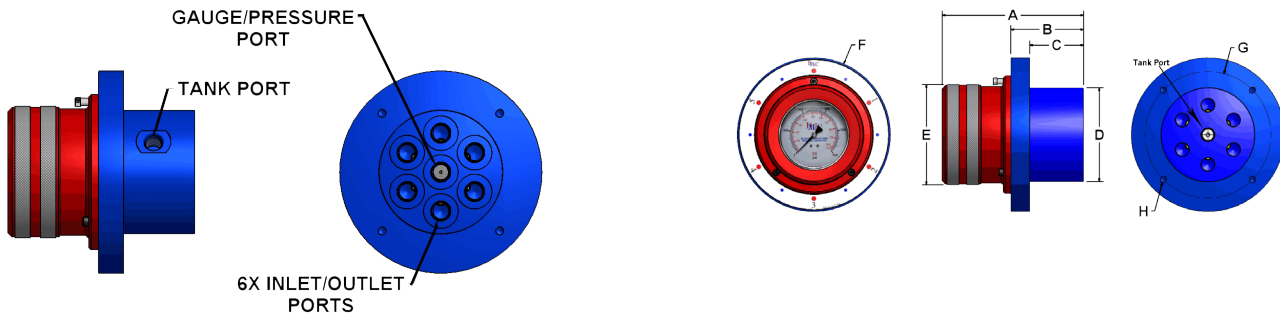

DMGI-RG

Note: If 12 stations ports ordered, additional 6 ports will be evenly spaced around surface of tank port in DMGI-RG and KG picture

DMGI-KG

DMGI	Dimensions (inches)							
	A Overall Length	B Back to Front	C Back to Mounting	D Body Diameter	E Knob Diameter	F Flange Diameter	G Bolt Pattern	H Mounting Bolt
DMGI-KG	4.50	2.32	1.72	2.98	3.18	4.88	4.00	1/4-20 UNC
DMGI-RG								

Sealing	
Code	Description
2	EPR / EPDM
3	Viton

Pressure	
Code	Description
4	3000 PSI Aluminum
1	10000 PSI Steel

DMGI - KG 12 \*\* S 4 3

Model	
Code	Description
KG	Gauge In Knob Iso
RG	Remote Gauge Iso

# Stations	
Code	Description
06	Six Stations
12	Twelve Stations

Gauge Range
For 'KG' model, supply the 2-digit gauge ordering code. Please refer to table on 'C' Series Bourdon Gauges (eg: 13 = 0/3000 PSI, OF = 30 "Hg/30 PSI)

Thread	
Code	Description
S	SAE
B	BSPP
N	NPT



www.dmic.com  
DMIC Flange Catalog  
Copyright ©2022 Delaware Mfg.

Call Toll Free 1-800-248-DMIC (3642)  
In Canada 1-800-320-DMIC (3642)